

Classic POU

Simplicity at its best

Practical Reliable Affordable

The best quality, entry level mains-fed cooler at the lowest price.

Aimed at customers who simply want a reliable cooler without the extra features, the Classic POU is an efficient, reliable and highly cost effective mains-fed cooler, making it a great addition to any watercooler fleet.

The Classic POU is manufactured to the highest quality standards in the UK, making this inexpensive cooler exceptional value and more reliable when compared to its Far Eastern equivalents.

Key Features

- ✔ Solid and reliable stainless steel reservoir
- ✔ Cold water storage capacity of 1.8 litres dispensing 6°C chilled water
- ✔ Water cooling time of 20 minutes
- ✔ Modular design that's easy to service
- ✔ Robust construction for ultimate durability
- ✔ Available in a choice of colours
- ✔ Cook & Cold or Hot & Cold models available



For sales or a demonstration, Call



0121 373 0037

aarnold@gorillawatercoolers.co.uk



GORILLA WATER COOLERS

Cooler Design and Components

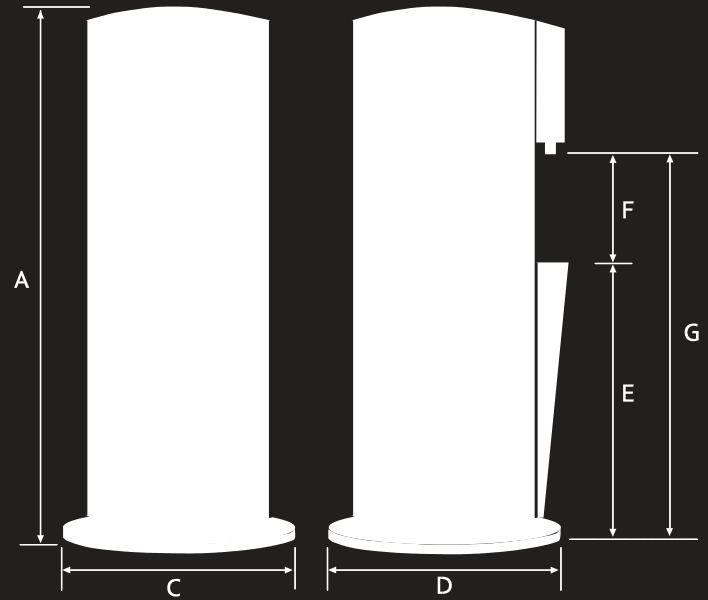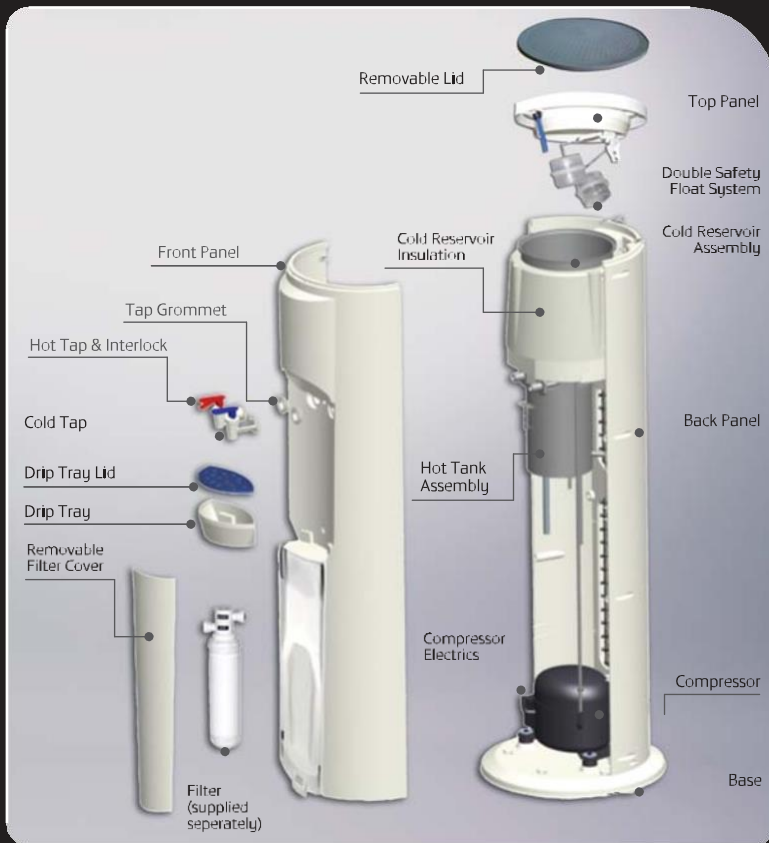

A	Total Height	1000mm
B	Cooler Diameter	330mm
C	Total Width (incl. Base)	394mm
D	Total Depth (incl. Base)	394mm
E	Cup Stand Height	520mm
F	Cup/Bottle Niche Height	200mm
G	Dispense Lever Height	750mm

Technical Specification

Available Formats	Cook & Cold or Hot & Cold	Water Filtration	*Filters not included
Dimensions (HxWxD)	1000mm x 330cm x 330cm	Water Filter Life	*Filters not included
Weight	12.25kg	Air Filtration/Filter Life	0.5 microns / 3 months
Colours	White. Additional colours available on request	Hot Tank Electrical Consumption	0.12 kWhr/day (stand by) 0.21 kWhr/day (5L a day)
Material	ABS Polymer	Hot Tank Capacity	1.5 litres (hot & cold model only)
Cold Tank Capacity	1.8 litres	Hot Water Temperature	85°C
Cold Water Temperature	6°C	Hot Tank Heat Up Time	10 minutes
Cold Tank Cooling Time	20 minutes	Hot Tank Burst Rate	6 cups
Burst Rate (below 12°C)	10 consecutive cups	Electrical Rating	230V-0.82A-50Hz
Chilled Water Capacity	50 cups / 7.5 litres an hour	Recommended Fuse	13A (UK)
Cooling/Dispense	Stainless Steel Fixed Reservoir System	Maximum Power Consumption	112 watts (Cook & Cold) 620 watts (Hot & Cold)
Compressor Type	AES30DS	Water Connection	Polyethelene Water Tubing 6mm
Refrigeration Charge	R134A 25g cooling liquid	Water Inlet Pressure	Recommended regulated pressure of 300,000 Pa (0.3 MPa), 3 bar

Part No's, Installation & Service Items

Item	Part No.	Qty
Classic POU (Cook & Cold) – White (GB)	BP32WH-GB	1
Classic POU (Cook & Cold) – White (EU)	BP32WH-EU	1
Classic POU (Hot & Cold) – White (GB)	BP34WH-EU	1
Classic POU (Hot & Cold) – White (EU)	BP34WH-GB	1
Water Tubing - 6mm OD (Blue)	BJC596	100mtrs
Water Tubing - 6mm OD (Blue)	BJC599	100mtrs
POU Installation Kit (including non-return valve, pressure regulator, Water Block, 6mm connector)	BIA401	1



GORILLA WATER COOLERS